

FORM PTO-1190 (REV 12-29-99)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <div style="text-align: center; font-size: 1.2em; font-weight: bold;">11247</div>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES          DESIGNATED/ELECTED OFFICE (DO/EO/US)          CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <div style="text-align: center; font-size: 1.5em; font-weight: bold;">097869563</div>	
INTERNATIONAL APPLICATION NO. <div style="text-align: center;">PCT/AU99/01150</div>		INTERNATIONAL FILING DATE <div style="text-align: center;">December 22, 1999</div>		PRIORITY DATE CLAIMED <div style="text-align: center;">JANUARY 6, 1999</div>	
TITLE OF INVENTION     Method For Assembly Of Insulated Housings For Electrical Equipment and Incorporation Of Circuit Interrupters Therein					
APPLICANT(S) FOR DO/EO/US <div style="text-align: center;">David Russell Murray and Brett Alexander Watson</div>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>					
Items 11. to 16. below concern document(s) or information included:					
<ol style="list-style-type: none"> <li>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input type="checkbox"/> A <b>FIRST</b> preliminary amendment.  <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>14. <input type="checkbox"/> A substitute specification.</li> <li>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>16. <input type="checkbox"/> Other items or information:</li> </ol>					

US APPLICATION NO. <b>09/1869563</b> INTERNATIONAL APPLICATION NO. <b>PCT/AU99/01150</b>		ATTORNEY'S DOCKET NUMBER <b>11247</b>					
17. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$670.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$96.00 <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr> <td colspan="2" style="height: 100px;"></td> </tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY						
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">\$ 970.00</td> <td style="width:50%;"></td> </tr> <tr> <td>\$ 130.00</td> <td></td> </tr> </table>		\$ 970.00		\$ 130.00	
\$ 970.00							
\$ 130.00							
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE				
Total claims	32 - 20 =	12	X \$18.00				
Independent claims	4 - 3 =	1	X \$78.00				
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00				
<b>TOTAL OF ABOVE CALCULATIONS =</b>			<b>\$ 1394.00</b>				
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).			\$				
<b>SUBTOTAL =</b>			<b>\$ 1394.00</b>				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$				
<b>TOTAL NATIONAL FEE =</b>			<b>\$ 1394.00</b>				
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property .			+				
<b>TOTAL FEES ENCLOSED =</b>			<b>\$ 1394.00</b>				
			Amount to be:				
			refunded				
			charged				

a. ☒ A check in the amount of \$ 1,394.00 to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 07-1525. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**RONALD M. GOLDMAN, ESQ.**  
**Roth & Goldman**  
**21535 Hawthorne Blvd. Suite 500**  
**Torrance, California 90503**

  
 SIGNATURE:  
**RONALD M. GOLDMAN**  
 NAME  
24,057  
 REGISTRATION NUMBER



09869563-033101

TITLE

"METHOD FOR ASSEMBLY OF INSULATED HOUSINGS FOR  
ELECTRICAL EQUIPMENT AND INCORPORATION OF CIRCUIT  
INTERRUPTERS THEREIN"

5

FIELD OF THE INVENTION

This invention is concerned with improvements in housings for electrical equipment such as switching, measuring and control apparatus and methods for manufacture thereof.

10 Particularly, although not exclusively, the invention is concerned with a method for incorporation of a circuit interrupter into a pre-moulded insulating body.

The invention is also concerned with methods of application of a resilient insulating medium to a circuit interrupter prior to incorporation  
15 into an insulating body.

The invention is further concerned with a method of assembly of housings for electrical equipment.

DESCRIPTION OF RELATED ART

20 PCT/AU94/04835 (WO 94/25973) describes an integrated high voltage system for switching power and sensing conditions within power lines. The system operates as a recloser or sectionaliser in power distribution networks.

The system comprises a vacuum interrupter initially pre-cast into  
25 an engineered, highly filled cycloaliphatic epoxy resin containing from about 68-73% of a ground silica filler. The epoxy encapsulated vacuum interrupter and other components are then encapsulated into a highly filled polyester based polymer concrete such as Polysil (Registered trade mark of The Electric Power Research Institute).

30 The coefficient of thermal expansion of the initial encapsulant is said to closely match that of the other components thereby avoid stress cracking at the engineered epoxy/Polysil interface.

US 5808258 describes an encapsulated high voltage switch comprising an elastomeric housing having a prefabricated tubular dielectric reinforcing element moulded or press fitted therewithin. A ceramic vacuum interrupter is disposed within the reinforcing element and surrounded by a dielectric filler material such as petroleum-based and silicone-based greases, silicone gels or RTV elastomers such as silicone rubber. The space between the vacuum interrupter and the tubular reinforcing element may be loosely packed with the filler material and mineral oil or silicone oil is introduced to swell the polymeric filler to provide a void free interface with the ceramic vacuum bottle.

US 5597992 describes a ceramic vacuum interrupter surrounded by a layer of polyurethane and encapsulated in a cycloaliphatic epoxy resin body.

PCT/US97/15936 (WO 98/11582) describes a method for casting a ceramic vacuum interrupter in an epoxy encapsulation.

This document deals with a method and apparatus for overcoming a stated prior art problem of direct epoxy encapsulation of polyurethane coated vacuum interrupters of the type described in US 5597992 above wherein differing coefficients of expansion of the polyurethane and epoxy materials lead to stress cracking in the epoxy encapsulant.

As the prior art demonstrates, there is an ongoing need to improve the method of incorporating ceramic vacuum interrupters in dielectric housing materials to reduce manufacturing costs and otherwise to improve the reliability of high voltage switching mechanisms in the field.

The prior art also demonstrates a pre-occupation with a ceramic vacuum interrupter which is permanently embodied in the epoxy housing by encapsulation at the time of manufacture of the housing.

While the prior art encapsulated vacuum interrupters may be generally effective for their intended purpose there are severe shortcoming and limitations associated with the final step of encapsulation of the vacuum interrupter in the interrupter housing.

PCT/US94/04835 and PCT/US97/15936 in particular deal with the

problems which can arise due to difference between the respective coefficients of thermal expansion of encapsulating materials and the ceramic vacuum interrupter housings.

5 PCT/US94/04835 seeks to overcome the thermal stress problems by utilising highly filled polymeric primary and secondary encapsulation materials having similar coefficients of thermal expansion.

10 PCT/US97/15936 utilises an expanded silicone rubber sleeve around the vacuum interrupter body to cushion the stresses in the epoxy encapsulation as it shrinks upon cooling. This specification claims that the expanded silicone has a coefficient of thermal expansion within the range of 60 to 90 x 10<sup>-6</sup> mm/mm/°C and is relatively constant over the range of from -40°C to 160°C.

15 A possible disadvantage in the use of a preformed sleeve of elastomeric material is the difficulty in consistently obtaining a void free interface between the silicone rubber sleeve and the surface of the ceramic vacuum interrupter. Even when the sleeve is progressively shrunk on the ceramic surface from the middle towards the opposite ends, it is possible that there remains at least a mono-molecular layer of air or an air pocket which can provide a tracking path for partial discharging at the interface between the sleeve and the ceramic interrupter body.

20 It is stated in this specification that a liquid silane adhesion primer may be applied to the ceramic interrupter body or to the inner surface of the sleeve before the sleeve is applied to the interrupter body. Thereafter the bottle and sleeve are allowed to rest for 24 hours to enable the liquid silane primer to diffuse through the sleeve to enhance the bond between the sleeve and the epoxy encapsulation.

25 While a silane primer is required to enhance the ceramic/silicone bond, again it is considered that this technique can reduce that bond and actually draw air into the interface region as the liquid silane solution diffuses into the silicone rubber thereby creating a partial vacuum.

30 One of the greatest disadvantages of prior art epoxy encapsulated vacuum interrupters is that the electrical integrity of the encapsulating

5 interrupter itself needs replacement. Because it is encapsulated in the epoxy body, it is not possible to simply replace the interrupter and again the entire assembly must be discarded.

10

## 15

It is a further aim to provide an improved method of assembly of housings for electrical equipment.

20

According to one aspect of the invention there is provided a method of incorporating a vacuum interrupter into a housing, said method comprising the steps of:-

25

inserting said vacuum interrupter with attached said at least one sleeve into a locating cavity of pre-determined shape in a pre-moulded polymeric housing; and,

30

If required said at least one sleeve may be moulded directly on to an exterior surface of said vacuum interrupter.

Alternatively, said at least one sleeve may be preformed and subsequently attached to an exterior surface of said vacuum interrupter.

If required said at least one sleeve is moulded by a casting process with a flowable curable polymeric composition.

5 If required said at least one sleeve may be comprised of a substantially rigid material.

Preferably said at least one sleeve is comprised of an elastomeric material.

10 Suitably the polymeric composition has a dielectric strength in the range 10 to 30 kV/mm.

Said at least one sleeve may extend over at least part of the axial length of the exposed surface of said vacuum interrupter.

15 Alternatively said at least one sleeve may extend over one or more circumferential regions between opposed ends of the surface of said vacuum interrupter.

If required said at least one sleeve may comprise one or more circumferential rib-like projections.

20 Said one or more circumferential rib-like projections may comprise a helical screw thread adapted to engage a complementary screw threaded surface within said cavity.

The outermost surface or surfaces of said at least one sleeve are preferably adapted to be an interference fit in said locating cavity within said housing.

The cavity may comprise parallel inner side wall surfaces.

25 Preferably the cavity includes tapering inner side wall surfaces converging from a proximal end adjacent a mouth of said cavity to a distal end spaced therefrom.

30 The vacuum interrupter may be mechanically secured within said cavity by frictional engagement between said at least one sleeve and an inner wall surface of said cavity.

Alternatively the vacuum interrupter may be mechanically secured in said cavity by an adhesive material.

Preferably the vacuum interrupter is mechanically secured in said cavity by axial tension applied by a screw threaded fastener extending via an aperture in the base of said cavity to a screw threaded terminal of a fixed switch contact by said interrupter.

5 According to another aspect of the invention there is provided a method for removably locating an interrupter in an insulating housing, said method comprising the steps of:-

expanding at least one sleeve of flexible polymeric material;

10 positioning said at least one sleeve over a predetermined region of said interrupter;

allowing the sleeve to contract under tension about part or all of an outer wall of the interrupter;

15 inserting said interrupter with attached sleeve into a locating cavity of a predetermined shape in a pre-moulded rigid polymeric insulating housing; and,

removably mechanically securing in said cavity said interrupter with attached sleeve.

Suitably said at least one sleeve is allowed to contract about said interrupter under reduced atmospheric pressure.

20 If required said at least one sleeve may be expanded in a radial direction relative to a longitudinal axis of said sleeve.

Said at least one sleeve may be attached to an outer wall of said interrupter by an adhesive composition.

25 Suitably the outer surface of said at least one sleeve has a shape complementary to the locating cavity of said housing.

Preferably said at least one sleeve and the locating cavity have complementary tapered engaging surfaces.

The outermost surface or surfaces of said at least one sleeve are preferably adapted to be an interference fit in said locating cavity.

30 If required the cavity may have parallel inner wall surfaces.

Preferably the locating cavity tapers convergently from a proximal end adjacent a mouth of said cavity to a distal end spaced therefrom.

If required said interrupter may have a plurality of axially spaced expanded sleeves.

Said at least one sleeve may comprise one or more circumferential rib-like projections.

5 If required the interrupter with attached sleeve may be removably secured in said cavity by axial tension applied by a screw threaded fastener extending via an aperture in the base of said cavity to a screw threaded terminal of a fixed switch contact of said interrupter.

10 Suitably said at least one sleeve is subjected to radial compression between said interrupter and an inner wall or walls of said cavity when secured therein.

Preferably said at least one sleeve is formed from a castable or mouldable polymeric material.

Most preferably said polymeric material is resilient.

15 The polymeric material is preferably elastomeric.

If required, the polymeric material may comprise a silicone polymer.

20 According to yet another aspect of the invention there is provided a method of assembly of an insulating housing for electrical equipment, said method comprising the steps of:-

securing over a spigot-like coupling member of an insulating housing element a layer of flexible polymeric material;

inserting, into a socket-like coupling member of an insulating housing element said spigot-like coupling member; and,

25 securing together said spigot-like coupling member and said socket-like coupling member under axial tension to induce radial compression of said layer of flexible polymeric material.

30 If required one or more cavities may be formed in an outer surface of said spigot-like member and/or an inner surface of said socket-like member to accommodate, in use, differential thermal expansion between said coupling members and said layer of flexible polymeric material.

Preferably said socket-like coupling member is heated before

securing to said spigot-like coupling member whereby axial, thermal contraction of said socket-like member occurs upon cooling.

Said layer of flexible polymeric material may be formed from a castable or mouldable polymer.

5 Suitably said polymer comprises an elastomer.

Preferably said elastomer comprises a silicone polymer.

If required said socket-like coupling member and said spigot-like coupling member include coupling surfaces of complementary shape.

10 Suitably said socket-like coupling member and said spigot-like coupling member comprise complementary frusto-conical coupling surfaces.

The layer of flexible polymeric material may comprise at least one sleeve member.

15 Said at least one sleeve member may be radially expanded to accommodate said spigot-like coupling member.

Alternatively said at least one sleeve member may be cast or moulded about said spigot-like coupling member.

If required said at least one sleeve member may comprise a plurality of axially spaced sleeve members.

20 Said at least one sleeve member may comprise one or more circumferential projections.

25 If required said socket-like coupling member and said spigot like coupling member are subjected to axial tension to at least partially compress said layer of flexible polymeric material before said socket-like coupling member is allowed to undergo thermal contraction.

Mechanical and/or chemical adhesion may be effected between said layer of flexible polymeric material and respective contact surfaces of said spigot-like coupling member and/or said socket-like coupling member.

30 Suitably mechanical and/or chemical adhesion may be effected under a reduced atmospheric pressure.

According to a still further aspect of the invention there is provided

a method of coupling housing elements of an insulating housing for electrical equipment, said method comprising the steps of:-

forming complementary frusto-conical surfaces on respective socket and spigot coupling members of housing elements to be coupled;

5 establishing a temperature differential between a housing element having a socket coupling member and a housing element having a spigot coupling member whereby said socket coupling member undergoes thermal expansion relative to said spigot coupling member; and,

10 coupling said socket and spigot coupling members and allowing the temperature differential therebetween to dissipate whereby frictional engagement is achieved between respective housing elements with said spigot coupling element under radial compression and said socket coupling under circumferential tension.

15 Suitably said frusto-conical complementary surfaces are formed by machining.

If required said frusto-conical complementary surfaces are formed by grinding.

20 Preferably the complementary frusto-conical surfaces of respective socket and spigot members are lapped together using a lapping compound.

Suitably the taper angle of the complementary frusto conical surfaces is from  $0.5^\circ$  to an angle less than the angle of friction for the respective surfaces.

25 Suitably, the temperature differential between the socket and spigot coupling elements is in the range of from  $20^\circ\text{C}$  to  $100^\circ\text{C}$ .

Preferably the temperature differential is in the range of from  $50^\circ\text{C}$  to  $80^\circ\text{C}$ .

30 According to another aspect of the invention there is provided an electrical switching device embodying a circuit interrupter incorporated in an insulating body according to the abovedescribed method.

### BRIEF DESCRIPTION OF DRAWINGS

In order that the invention in its various aspects may be more readily understood and put into practical effect, reference will now be made to preferred embodiments described hereinafter and illustrated in the accompanying drawings in which:-

FIG 1 shows a cross sectional view of a sleeved vacuum interrupter located in an insulated housing.

FIG 2 and 3 show alternative embodiments of the assembly of FIG 1.

FIG 4 shows a cross sectional view of a high voltage recloser assembled in accordance with one or more aspects of the invention.

FIG 5 shows schematically the application under vacuum of an expanded sleeve to a vacuum interrupter.

FIG 6 shows a heat shrunk coupling between insulated housing element.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In FIG 1, a ceramic vacuum interrupter 1 of a conventional type has a silicone rubber sleeve 2 having a generally cylindrical inner wall 3 and a frusto-conical outer wall 4.

The interrupter/sleeve assembly 1, 2 is located in a cavity 5 in a pre-moulded insulating housing 6, the cavity having a frusto conical inner wall surface 7.

The vacuum interrupter 1 is located radially within cavity 5 by means of compressive engagement between wall surfaces 4 and 7 and axially by means of a threaded stud 8 locating in the threaded socket 9 of a fixed switch contact of the interrupter via copper heat sink/conductor member 10. Vacuum interrupter 1 is axially tensioned by a tubular nut 11 engaging stud 8 whereby sleeve 2 is subjected to a degree of radial compression.

In the manufacture of sleeve 2, the outer ceramic wall surface of vacuum interrupter 1 is coated with a silane primer such a Wacker G 790

which is recommended for addition - crosslinking silicone polymers.

After allowing the primer to dry at ambient temperature for about one hour or for about 15 minutes at 100°C, the vacuum insulator is located in a mould (not shown) to which is added a liquid room temperature vulcanizing (RTV) silicone rubber such as Wacker Powersil 600 - a two component addition curing compound.

The monomer and catalyst are mixed in the required ratio and the mixture is submitted to a reduced pressure of less than 20 mbar to remove any entrained air bubbles.

After deaeration, the liquid mixture is poured into the mould cavity and allowed to cure before removal from the mould.

The assembly, when removed from the mould has a void free interface between the sleeve and the ceramic surface of the interrupter. The high degree of adhesion thus achieved provides a degradation resistant electrical and mechanical integrity for the life of the interrupter.

The outer surface 4 of sleeve 2 and/or the inner surface 7 of cavity 5 of body 6 are then lubricated with a silicone oil or grease and the interrupter/sleeve assembly 1, 2 is pushed gently into cavity 5 with the fixed switch contact uppermost.

A threaded stud 8 is then inserted via aperture 12 in body 6 to engage the threaded socket 9 of the fixed switch contact.

A nut 11 is screwed on to stud 8 and gently tightened until it locates in its final resting place as shown.

The silicone rubber typically has a hardness of around 25 Shore A and when the vacuum interrupter is seated in its final resting place, sleeve 2 has undergone a compression of about 6-12%, preferably 7.5-8.0% in radial thickness.

Depending upon the degree of taper in the cavity 5 and/or the configuration of sleeve 2, silicone rubbers having a hardness of from 15 Shore A to 65 Shore A may be employed.

As an alternative to casting the sleeve 2 directly on to the surface of vacuum interrupter 1, the sleeve may be preformed from any suitable

polymer by any suitable moulding means such as mould casting or injection moulding.

Because the dielectric constants of the sleeve 2 and housing 6 are so much greater than that of air, it is desirable to ensure that air is excluded from the respective interfaces between the outer surface 4 of sleeve 2 and inner wall 7 and in particular between the inner surface 3 of sleeve 2 and the vacuum interrupter 1 where even small air pockets can cause a partial discharge leading to premature electrical failure of the insulating sleeve.

Although for the purpose of excluding air, it is preferred to cast the sleeve 2 directly on to the vacuum interrupter under vacuum, there are other alternatives.

As described in International Publication WO 98/11582 (PCT/US97/15936) a cylindrical rubber sleeve is expanded by an inflatable bladder in a vacuum manifold to about 2-2½ times its original diameter. A silane primed vacuum interrupter is then inserted into the expanded sleeve before the vacuum suction is discontinued in the manifold whereby the sleeve collapses onto the interrupter under tension.

Due to the possibility of entrapment of at least a monomolecular layer of air or air pocket between the sleeve and the vacuum interrupter, it is preferred that the vacuum manifold be located in an evacuable chamber so that the sleeve can be collapsed onto the vacuum interrupter in almost the complete absence of gas molecules.

It is also preferred that the silane primer on the surface of the vacuum interrupter is at least partially cured before collapsing the silicone rubber sleeve thereonto.

By employing this method of manufacture, it is possible to test the electrical integrity of housing 6 before final assembly and thereby avoid the prospect of discarding an entire assembly with a relatively expensive vacuum interrupter in the event that the housing is found to be faulty after moulding.

Moreover, in the event of a vacuum interrupter failure, it can be

readily replaced without the expense of a complete assembly as with the prior art.

It will be readily apparent to a skilled addressee that many modifications and variations may be made to the invention without departing from the spirit and scope thereof.

For example, the preformed insulating housing body 6 is conveniently cast from a cycloaliphatic epoxy resin however it may be made from suitable known weather resistant thermoplastic or thermosetting resins by injection or compression moulding. For indoor applications where weather resistance is not an issue, any suitable polymeric composition having the properties required for such a housing may be employed. Such polymers may include silicone modified epoxy or polyester resins.

Alternatively body 6 may be cast, injection moulded, compression moulded or rotation moulded from a known curable polymeric compound such as a filled polyester resin.

The pre-moulding process provides a smooth locating cavity 5 of high dimensional tolerances.

In other variations the shape of the locating cavity 5 and the configuration of sleeve 2 may be adapted to a wide range of shapes and features.

FIG 2 shows an alternative embodiment in which the sleeve 2 of silicone rubber comprises a generally cylindrical central portion 2a and ribs 2b having frusto-conical outer surface generally complementary to that of inner wall 7. Like reference numerals are employed for like features.

FIG 3 shows still another embodiment in which a solid frusto-conical sleeve 2, of the same general configuration of the sleeve of FIG 1, has formed in its outer circumferential surface a plurality of spaced channels 13 which form a plurality of ribs 14 therebetween. Otherwise like reference numerals apply to like features.

In still further variations of the invention the interrupter sleeve may

be formed by a castable or mouldable polymeric compound having suitable dielectric, thermal and mechanical properties. Such compounds may include polyurethanes, silicone rubbers, acrylic elastomers, butyl rubbers, vinyl resins, ethylene resins, polyesters, polyethers, epoxy resins or the like or mixtures or copolymers thereof without limiting the invention.

The sleeve may be formed by casting with a liquid curable compound or by insert injection or compression moulding.

In some applications, the sleeve 2 may be formed from a semi-conductive polymer or a combination of non-conductive and semi-conductive polymers.

FIGS 4-8 show further variations of the removable incorporation of a vacuum interrupter into an insulated housing. In these figures, where appropriate, like reference numerals are employed for like features.

FIG 4 shows a variations wherein sleeve 2 comprises a narrow rib located intermediate the ends of the ceramic wall of vacuum interrupter 1.

If required a channel-like recess 15 may be formed in the outer surface of rib 2 to form rib-like projections 16.

FIG 5 shows another embodiment wherein sleeve 2 is formed as a narrow rib adjacent the proximal end of interrupter 1.

In the case of the embodiments of FIGS 3 and 4, vacuum interrupter is firmly located in its recess 5 by tension on stud 9 and compressive engagement between the respective surfaces of sleeve 2 and wall 7.

FIG 6 shows a still further embodiment of the invention.

In this embodiment sleeve 2 and wall surface 7 are formed with complementary surfaces in the form of a coarse helical thread 17.

Sleeve 2 may be formed of hard or soft dielectric polymeric material and provides a substantially greater tracking path between the steel end caps of the vacuum interrupter.

To assist in locating the vacuum interrupter and in removal of air the threaded surface of sleeve 2 may be lubricated with a high dielectric lubricant such as silicone oil or silicon grease.

The vacuum interrupter is driven home by a mechanical engagement with the fixed switch terminal socket or moulded lugs 18 formed on the proximal end of sleeve 2.

5 If removal of the vacuum interrupter for repairs or the like is not required, the lubricant may comprise a liquid curable adhesive composition.

If required, the helical thread surfaces on the sleeve 2 and the wall 7 may be formed as a tapered thread.

FIG 7 shows yet another embodiment of the invention.

10 In this embodiment, the vacuum interrupter is mechanically fastened into cavity 5 by means of stud 8 and nut 11 and thereafter a curable liquid polymeric material 19 is poured into the void between the ceramic surface of the interrupter.

15 The polymeric material may comprise an elastomer or it may comprise a more rigid material.

If removal of the interrupter is required, the inner wall 7 of housing 6 may be coated with a dielectric release agent such as silicone oil or silicone grease.

20 In still further variations of the invention the interrupter sleeve may be formed by a castable or mouldable polymeric compound having suitable dielectric, thermal and mechanical properties. Such compounds may include polyurethanes, silicone rubbers, acrylic elastomers, butyl rubbers, vinyl resins, ethylene resins, polyesters, polyethers, epoxy resins or the like or mixtures or copolymers thereof without limiting the invention.

25 The sleeve may be formed by casting with a liquid curable compound or by insert injection or compression moulding.

In some applications, the sleeve 2 may be formed from a semi-conductive polymer or a combination of non-conductive and semi-conductive polymers.

30 FIG 8 shows a modified form of the invention wherein the vacuum interrupter 1 comprises a conventional ceramic or glass bodied device having a polyurethane sleeve 2 fitted as part of the manufacturing

process.

In the embodiment shown the sleeved interrupter 1 is located within body 6 with an air space in cavity 5 between the outer surface 2a of polyurethane sleeve 2 and the inner wall 7 and 6.

5 interrupter 1 is supported axially in the body 6 by tension from tubular nut 11 on the threaded stud 9 located in the threaded socket 10 of the fixed switch contact of interrupter 1.

FIG 9 shows another aspect of the invention wherein the underlying concepts of the aforementioned aspects of the invention are also embodied.

In FIG 9 there is illustrated a recloser housing 20 having one side of a high voltage conductor 21 coupled to a vacuum interrupter 22 (shown in phantom) as generally illustrated in FIGS 1-3.

The other side of conductor 21 is coupled to the movable switch contact 22a which is coupled via a push rod to a solenoid switch actuator (not shown) located below housing 20.

To facilitate easy assembly of the insulating housing 20 and its internal components (and otherwise to avoid complex mould structures and moulding techniques for encapsulation of internal componentry) the side arm housing 23 is formed as a separate moulding from the same material as main housing 20, for example, cycloaliphatic epoxy resin for good outdoor weathering properties.

Side arm housing 23 is formed with a socket-like aperture 24 to receive a spigot-like projection 25 formed integrally with main housing 20.

25 Spigot-like projection 25 has a central aperture in which is cast a conducting shaft 26 which is screw threadably engaged in a terminal 27 coupled to the movable switch contact of vacuum insulator 21.

Side arms housing 23 is secured to housing 20 by sliding it over the free end of shaft 26 until the mating socket and spigots engage. A resilient seal 28 is secured between shaft 26 and the inner wall of housing 23. Housing 20 and side arm housing 23 are secured under compression via a threaded nut 26a bearing on the outer end of side arm

housing 23.

Hitherto, the electrical and mechanical integrity of the joint between the complementary frusto-conical faces 29, 30 of aperture 24 and projection 25 has relied upon an adhesive such curable liquid epoxy resin applied to faces 29, 30 during assembly.

A difficulty with this method is that while it is desirable to raise the temperature of the liquid epoxy resin adhesive to between 120°-160°C to achieve rapid and complete curing, the coefficient of thermal expansion of epoxy resins is not constant over the range of from say, ambient to 160°C.

In a glass transition temperature range rising from between about 100°-120°C, the coefficient of thermal expansion increases by nearly 100%.

A difficulty with this differential rate of thermal expansion is that initially, the liquid resin may exude from the joint as curing commences but after curing commences and during the cool down phase, stresses can occur at the interfaces of the newly cured resin bond and the previously cured components.

Apart from giving rise to the possibility of mechanical and electrical defects, this method of joining is permanent and does not lend itself to the prospect of easy in-field repairs.

Another difficulty associated with epoxy resin housings is that if the temperature of the housing exceeds the heat distortion temperature of the resin (about 105°C) the socket and spigot elements can distort to destroy the electrical and mechanical properties of the joint. In any event, in the glass transition temperature range the epoxy resin changes from a somewhat elastic medium to a plastic medium.

As shown in FIG 9, the present invention utilises the same concept for removable location of a vacuum interrupter in an insulating housing to removably locate a side arm housing with the same mechanical and electrical integrity.

Instead of employing a curable epoxy adhesive between the side

arm housing 23 and the main housing 20, there is a compressed flexible polymeric sleeve 31 located therebetween.

Preferably the sleeve is comprised of an elastomeric silicone polymer as hereinbefore described. The sleeve 31 may be cast or moulded by any suitable process.

Suitably, the sleeve may include one or more locating ribs to locate in a corresponding circumferential channel 33 in frusto-conical face 29 and/or 30 or the inner and/or outer surfaces of the sleeve may simply include channelled recesses to allow for thermal expansion of the sleeve material into the recess cavities.

If required sleeve 31 can be cast directly onto spigot 25.

Conversely, the frusto-conical face 29 and/or 30 may include one or more circumferential ribs to locate in corresponding recesses (not shown) formed in the sleeve 31.

Preferably however, either or both of frusto-conical faces include one or more circumferential channels 33 which provide a space into which the material of sleeve 31 may expand during thermal cycling of the recloser assembly.

The one or more circumferential channels 33 suitably function as an air gap to increase the tracking path between conductors on opposite sides of the side arm joint to minimise partial discharge between the body and side arm joint and function in a manner similar to the embodiments of FIGS 2-5 previously described.

During assembly, sleeve 31 is placed over spigot-like projection 25, with or without a silicone oil lubricant and then pre-moulded side arm housing 23 is slid over sleeve 31 and threaded terminal shaft 26 is tensioned in threaded terminal 27 by means of flats or other suitable formations in the distal end 34 of conducting shaft 26.

Alternatively side arm housing 23 can be pre-heated to about 120°-160°C before assembly such that as the side arm housing 23 cools and contracts, it increases the degree of compression on sleeve 31 to form a tight weatherproof joint between side arm housing 23 and main

housing 20.

If required, sleeve 31 may be applied to projection 25 in an expanded state (under vacuum or otherwise) and similarly the side arm housing 23 may be engaged over sleeve 31 under vacuum or otherwise to avoid any gas inclusions.

As shown schematically in FIG 5, a vacuum interrupter 40, having a coating of at least partially cured silane primer or other suitable adhesive on the ceramic surface 41 is inserted into a silicone sleeve 42 of the type shown in FIG 1, the sleeve being retained in a radially stretched state in a vacuum manifold 43 in a manner similar to that described in WO 98/11582 (PCT/US97/15936).

Vacuum manifold 43 is enclosed in a vacuum chamber 44 with conduits 45 attached to a vacuum pump to retain the sleeve in the stretched state while inserting the vacuum interrupter.

After the vacuum interrupter is inserted but before the vacuum in conduits 45 is released, chamber 44 is evacuated via conduit 46 also connected to a vacuum pump.

As the vacuum in chamber 44 reaches the same level of reduced atmospheric pressure (or slightly greater than) that in conduits 45, the sleeve 42 is released from the vacuum manifold by resilient recovery forces acting against the substantially equalised pressure on opposite sides of the sleeve.

Sleeve 42 then contracts about the vacuum interrupter in the substantial absence of gas molecules which might otherwise be occluded in a layer or pockets between the sleeve and the surface of the vacuum interrupter.

It is considered however that the use of a partially cured or fully cured silane primer on the sleeve contacting surfaces 29, 30 in most cases will be sufficient to avoid gaseous inclusions however in conjunction with a silicone oil lubricant on both surfaces this substantially will minimise the risk of gaseous inclusions.

It will be apparent to a skilled addressee that many modifications

and variations may be made to the invention without departing from the spirit and scope thereof.

For example in FIG 9, the main housing 20 may include a socket-like recess to receive a spigot-like projection on side arm housing 23.

5 Similarly where a transversely directed conductor is required at the top of main housing 20, the upper part of main housing 20 may be adapted to receive an insulated housing extension in a manner similar to side arm housing 23.

10 In another variation, sleeve 31 may be truncated by removal of the solid end portion 32 to form a generally cylindrical sleeve 31 which could be produced by extrusion as a parallel walled tube or by a moulding or casting process to form a frusto conical tube of constant wall thickness.

The parallel walled tubular sleeve is then stretched over spigot 25 whereby it is retained thereon by tension in the sleeve wall.

15 FIG 11 shows an alternative method for forming a modular housing assembly of the type generally shown in FIG 9 and in this figure, like numerals apply to like features.

20 After main housing 20 and side arm housing 23 are moulded from, say, cycloaliphatic epoxy resin, the respective mating frusto-conical surfaces 29, 30 of socket 24 and spigot 25 are machined to achieve finely finished surfaces with highly complementary tapers.

The complementarity can be enhanced by lapping the surfaces with a fine grit lapping compound. A 120 grit compound has been found to be satisfactory.

25 The preferred taper angle for socket 24 and spigot 25 is about 3° radially but depending upon the nature of the finish of the tapered surfaces, the angle of friction can vary. The maximum taper angle must be less than the angle of friction otherwise the components cannot be coupled by shrink fitting as described below.

30 The side arm 23 is heated to about 80°C or about 60°C above ambient to form a temperature differential between side arm 23 and main housing 20.

5

5

10

10

15

20

25

CLAIMS

1. A method of incorporating an electrical circuit interrupter into a housing, said method comprising the steps of:-

forming, on an exterior surface of a circuit interrupter at least one  
5 polymeric sleeve of predetermined shape;

inserting said circuit interrupter with attached said at least one sleeve into a locating cavity of pre-determined shape in a pre-moulded polymeric housing; and,

mechanically securing therewithin said circuit interrupter with  
10 attached said at least one sleeve.

2. A method as claimed in claim 1 wherein said at least one sleeve is moulded directly on to an exterior surface of said circuit interrupter.

3. A method as claimed in claim 1 wherein said at least one sleeve may be preformed and subsequently attached to an exterior surface of  
15 said circuit interrupter.

4. A method as claimed in claim 2 wherein said at least one sleeve is moulded by a casting process with a flowable curable polymeric composition.

5. A method as claimed in claim 4 wherein said at least one sleeve is  
20 comprised of an elastomeric material.

6. A method as claimed in claim 1 wherein said sleeve extends over at least part of the axial length of the exposed surface of said circuit interrupter.

7. A method as claimed in claim 1 wherein said at least one sleeve  
25 extends over one or more circumferential regions between opposed ends of the surface of said circuit interrupter.

8. A method as claimed in claim 1 wherein said circuit interrupter is mechanically secured within said cavity by frictional engagement between said at least one sleeve and an inner wall surface of said cavity.

9. A method as claimed in claim 1 wherein said circuit interrupter is  
30 mechanically secured in said cavity by axial tension applied by a screw threaded fastener extending via an aperture in a base of said cavity to a

screw threaded terminal of a fixed switch contact by said interrupter.

10. A method for removably locating an electrical circuit interrupter in an insulating housing, said method comprising the steps of:-

expanding at least one sleeve of flexible polymeric material;

5 positioning said at least one sleeve over a predetermined region of said interrupter;

allowing the sleeve to contract under tension about part or all of an outer wall of the interrupter;

10 inserting said interrupter with attached sleeve into a locating cavity of a predetermined shape in a pre-moulded rigid polymeric insulating housing; and,

removably mechanically securing in said cavity said interrupter with attached sleeve.

11. A method as claimed in claim 10 wherein said at least one sleeve  
15 is allowed to contract about said interrupter under reduced atmospheric pressure.

12. A method as claimed in claim 10 wherein said at least one sleeve may be attached to an outer wall of said interrupter by an adhesive composition.

20 13. A method as claimed in claim 10 wherein said at least one sleeve and the locating cavity have complementary tapered engaging surfaces.

14. A method as claimed in claim 13 wherein the locating cavity tapers convergently from a proximal end adjacent a mouth of said cavity to a distal end spaced therefrom.

25 15. A method as claimed in claim 10 wherein said at least one sleeve comprises one or more circumferential rib-like projections.

16. A method as claimed in claim 10 wherein said interrupter with attached sleeve is removably secured in said cavity by axial tension applied by a screw threaded fastener extending via an aperture in the  
30 base of said cavity to a screw threaded terminal of a fixed switch contact of said interrupter.

17. A method as claimed in claim 16 wherein said at least one sleeve

is subjected to radial compression between said interrupter and an inner wall or walls of said cavity when secured therein.

18. A method as claimed in claim 10 wherein the polymeric material comprises an elastomeric silicone polymer.

5 19. A method of assembly of an insulating housing for electrical equipment, said method comprising the steps of:-

securing over a spigot-like coupling member of an insulating housing element a layer of flexible polymeric material;

10 inserting into a socket-like coupling member of an insulating housing element said spigot-like coupling member; and,

securing together said spigot-like coupling member and said socket-like coupling member under axial tension to induce radial compression of said layer of flexible polymeric material.

15 20. A method as claimed in claim 19 wherein one or more cavities are formed in an outer surface of said spigot-like member and/or an inner surface of said socket-like member to accommodate, in use, differential thermal expansion between said coupling members and said layer of flexible polymeric material.

20 21. A method as claimed in claim 20 wherein said socket like member is heated before securing to said spigot-like coupling member whereby axial thermal contraction of said socket-like member occurs upon cooling.

22. A method of coupling housing elements of an insulating housing for electrical equipment, said method comprising the steps of:-

25 forming complementary frusto-conical surfaces on respective socket and spigot coupling members of housing elements to be coupled;

establishing a temperature differential between a housing element having a socket coupling member and a housing element having a spigot coupling member whereby said socket coupling member undergoes thermal expansion relative to said spigot coupling member; and,

30 coupling said socket and spigot coupling members and allowing the temperature differential therebetween to dissipate whereby frictional engagement is achieved between respective housing elements with said

spigot coupling element under radial compression and said socket coupling under circumferential tension.

23. A method as claimed in claim 20 wherein said complementary frusto-conical surfaces are formed by machining.

5 24. A method as claimed in claim 20 wherein said complementary frusto-conical surfaces are formed by grinding.

25. A method as claimed in claim 20 wherein the complementary frusto-conical surfaces of respective socket and spigot members are lapped together using a lapping compound.

10 26. A method as claimed in claim 20 wherein the taper angle of the complementary frusto conical surfaces is from  $0.5^\circ$  to an angle less than the angle of friction for the respective surfaces.

15 27. A method as claimed in claim 20 wherein the temperature differential between the socket and spigot coupling elements is in the range of from  $20^\circ\text{C}$  to  $100^\circ\text{C}$ .

28. A method as claimed in claim 25 wherein the temperature differential is in the range of from  $50^\circ\text{C}$  to  $80^\circ\text{C}$ .

29. An electrical switching device incorporating a circuit interrupter according to the method of claim 1.

20 30. An electrical switching device removably incorporating a circuit interrupter according to the method of claim 10.

31. An insulating housing for an electrical switching device whenever assembled according to the method of claim 19.

25 32. An insulating housing for an electrical switching device whenever assembled according to the method of claim 20.

ABSTRACT

A pre-molded housing for electrical switching apparatus has incorporated therein a vacuum interrupter (1) surrounded by a silicone rubber sleeve (2). The outer surface of the sleeve (2) and the locating cavity (5) for the interrupter (1) have complementary tapered mating surfaces to enable removable location of the interrupter (1) in the housing (6) under axial tension. The insulating housing (6) has a side arm for a conductor. The side arm is coupled to the main housing body by a tapered socket and spigot joint effected by a temperature differential shrink fit of the socket onto the spigot.

1 / 11

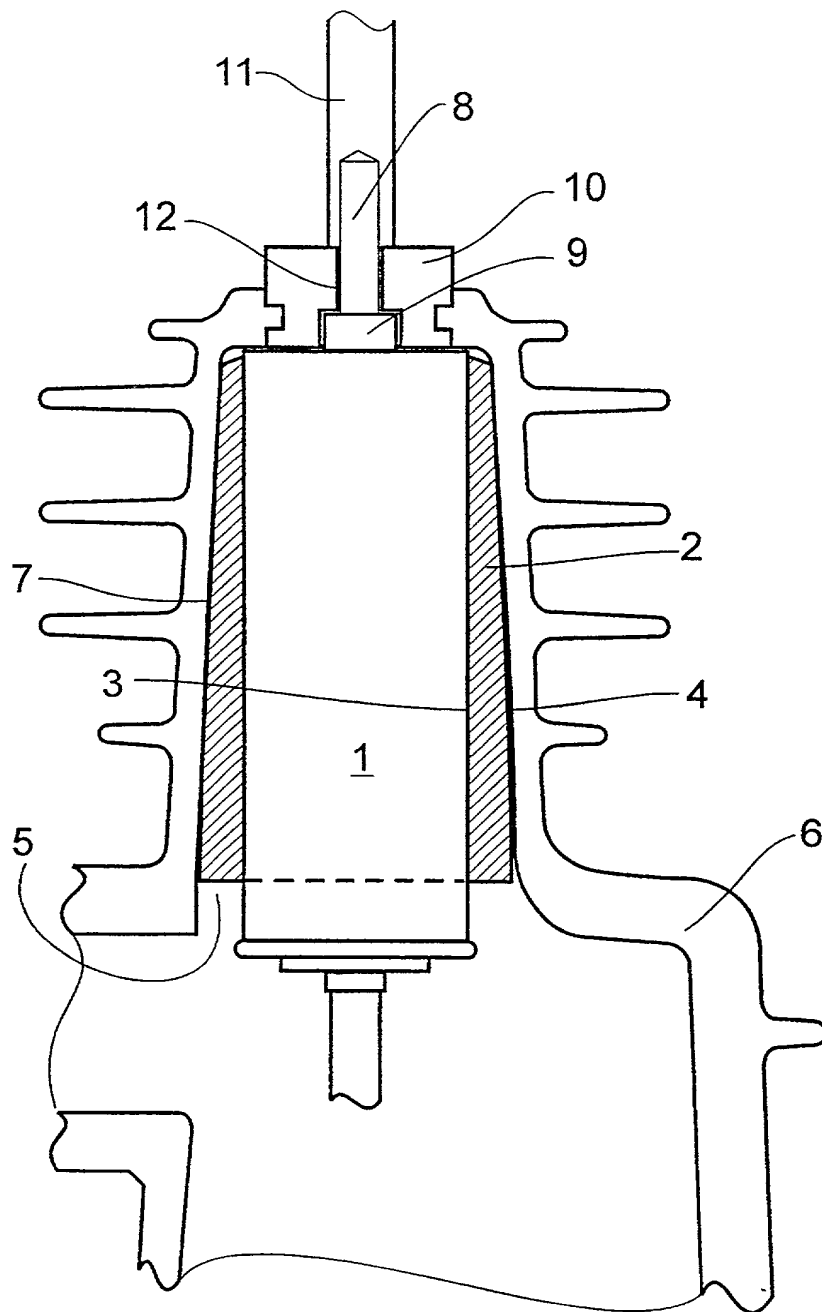


FIG. 1

2 / 11

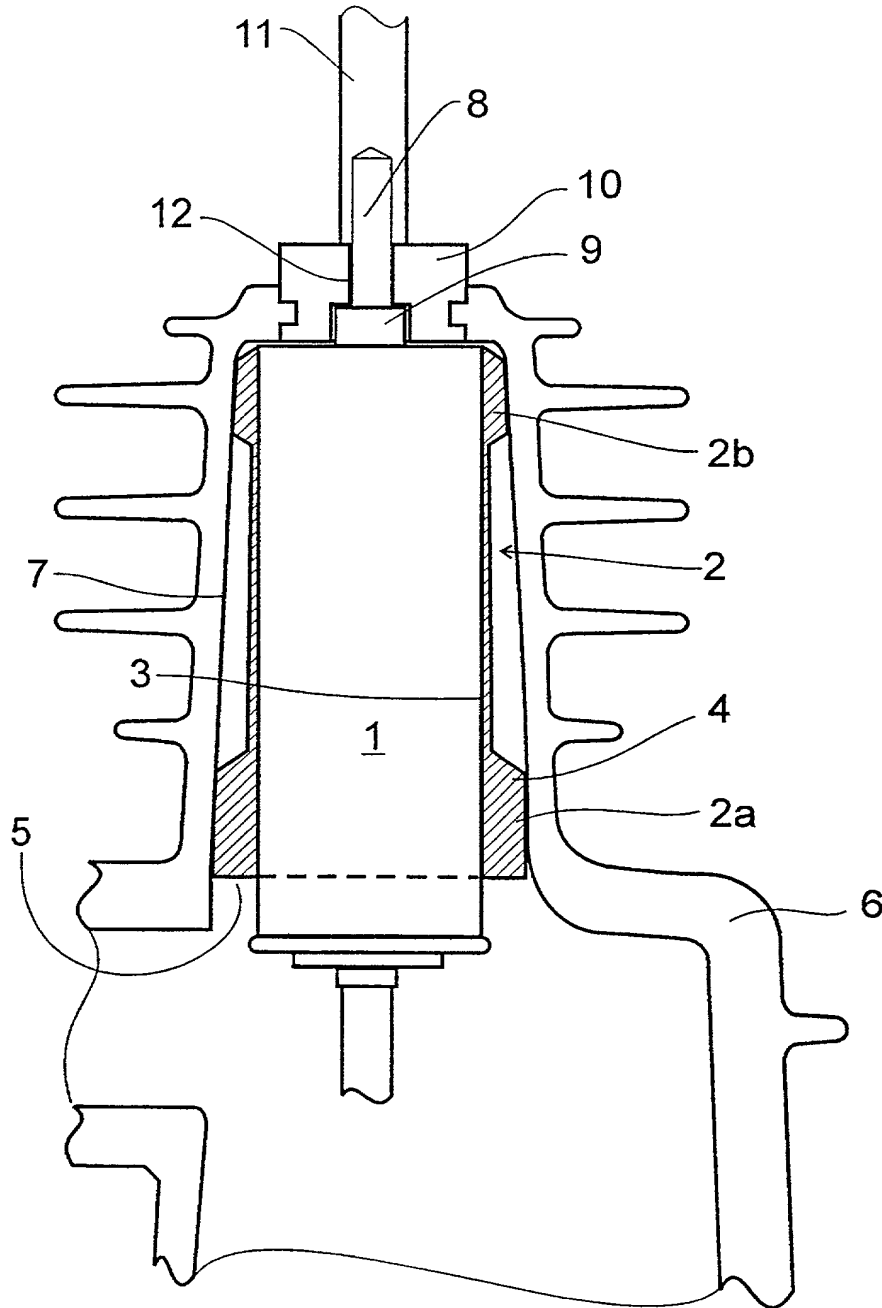


FIG. 2

3 / 11

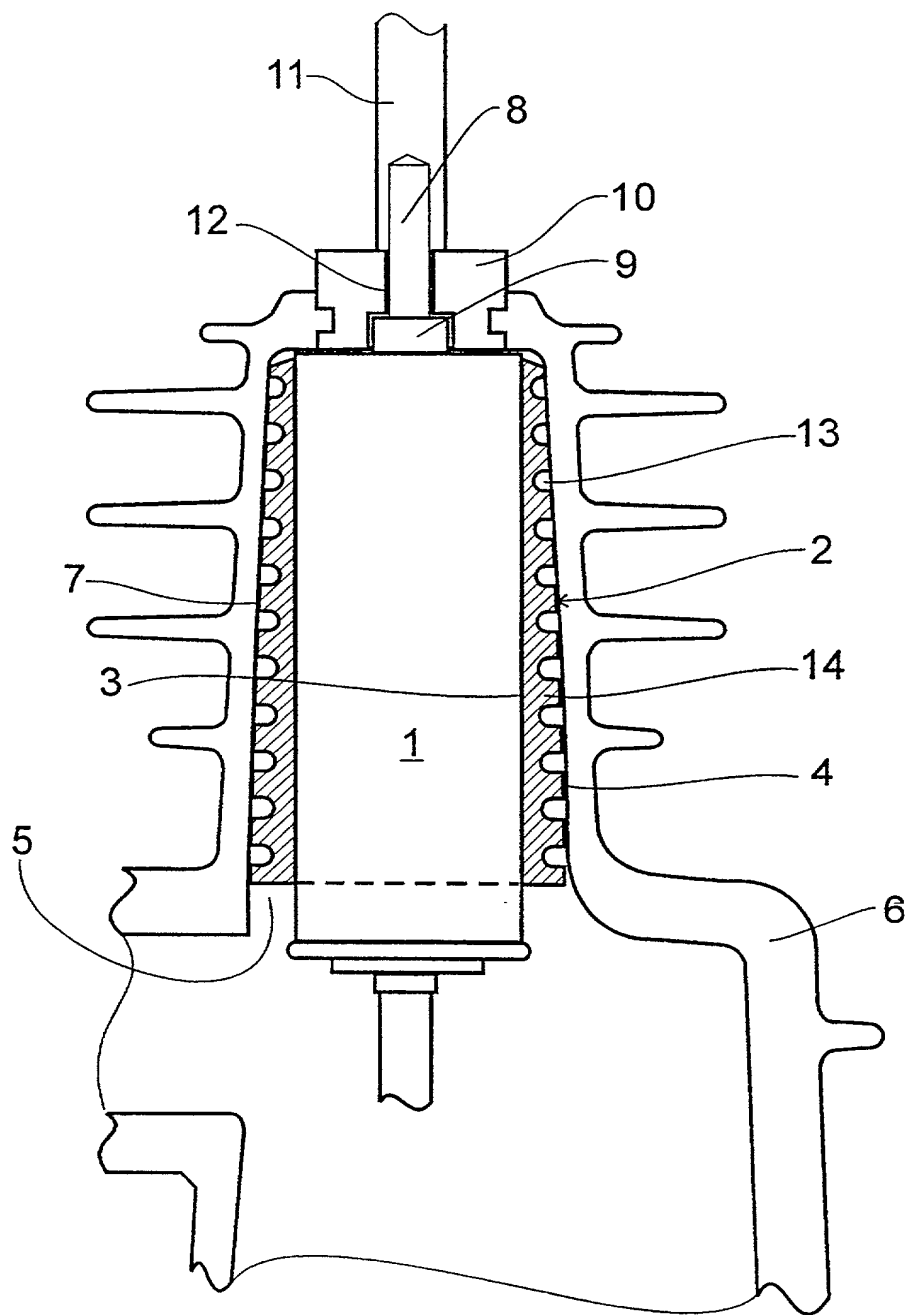


FIG. 3

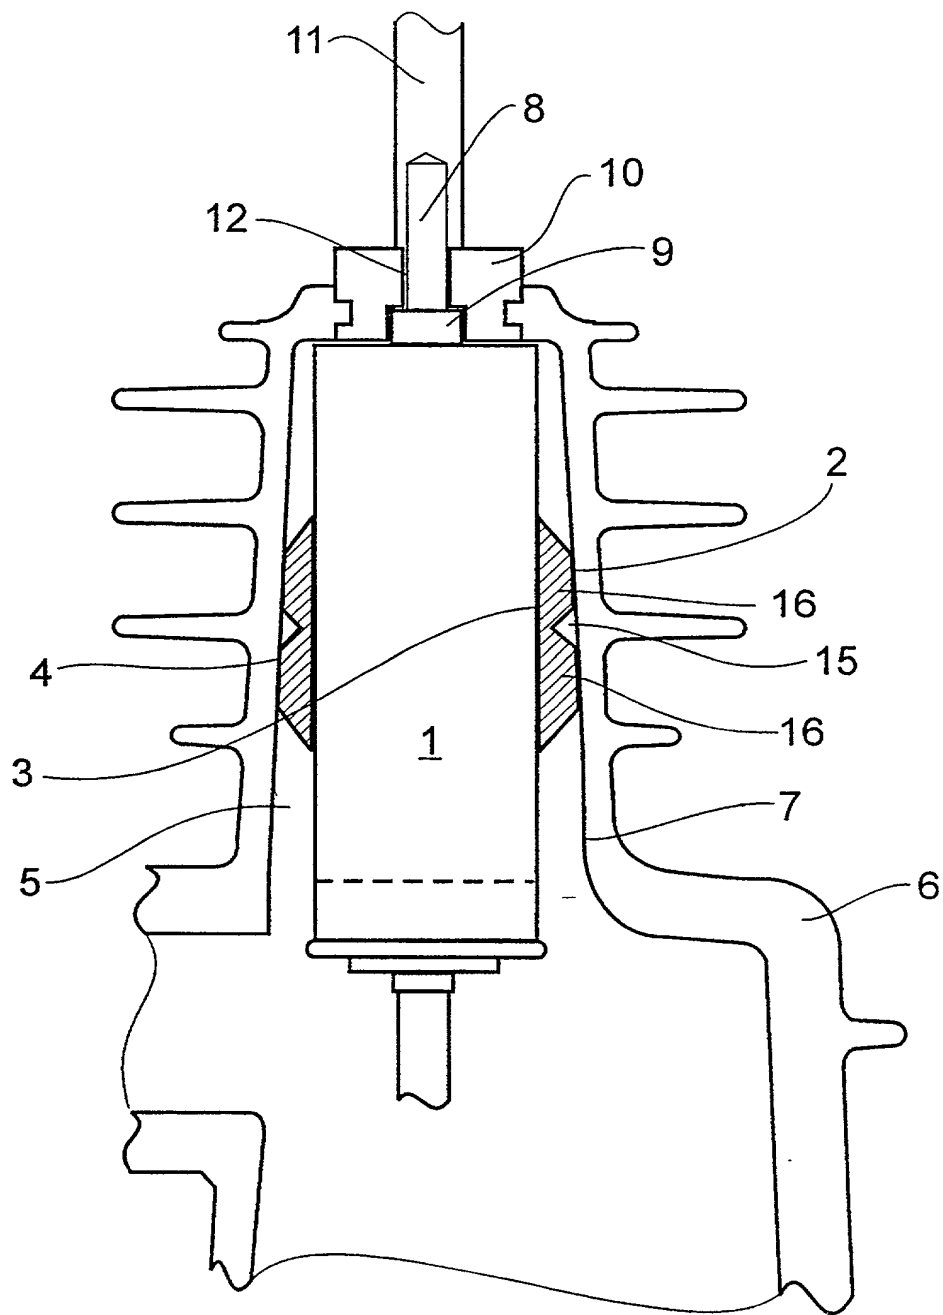


FIG. 4

5 / 11

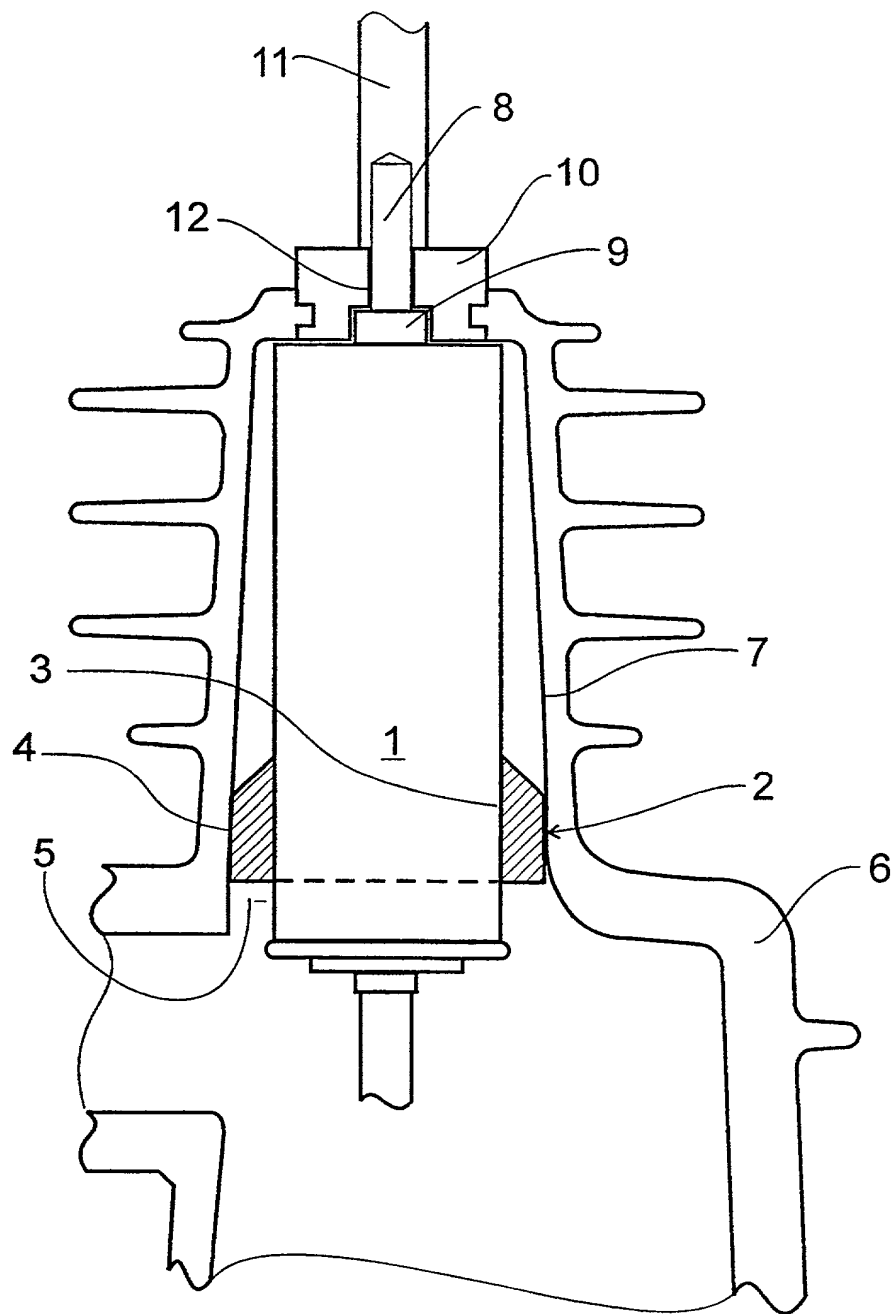


FIG. 5

6 / 11

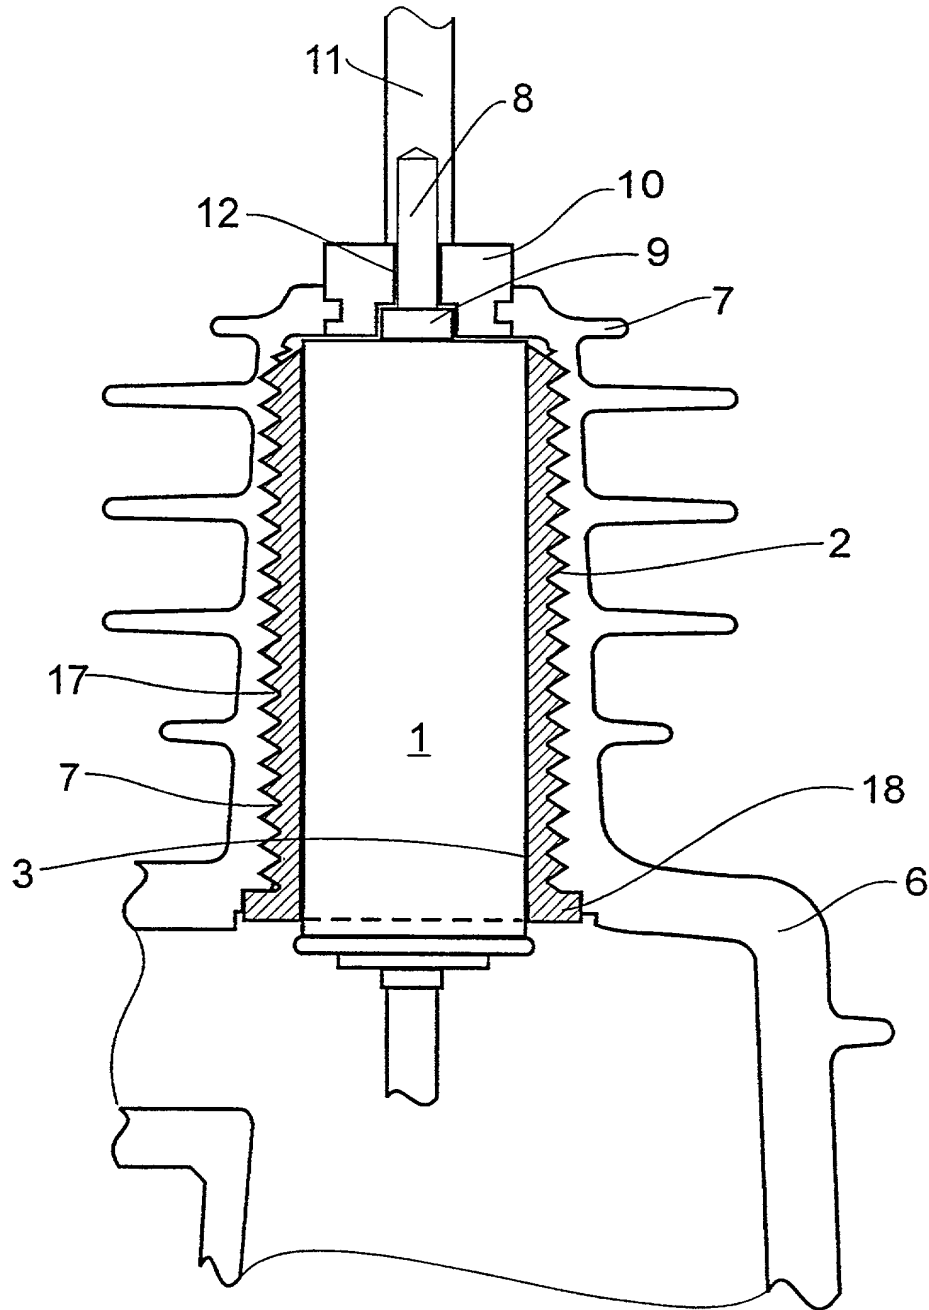


FIG. 6

7 / 11

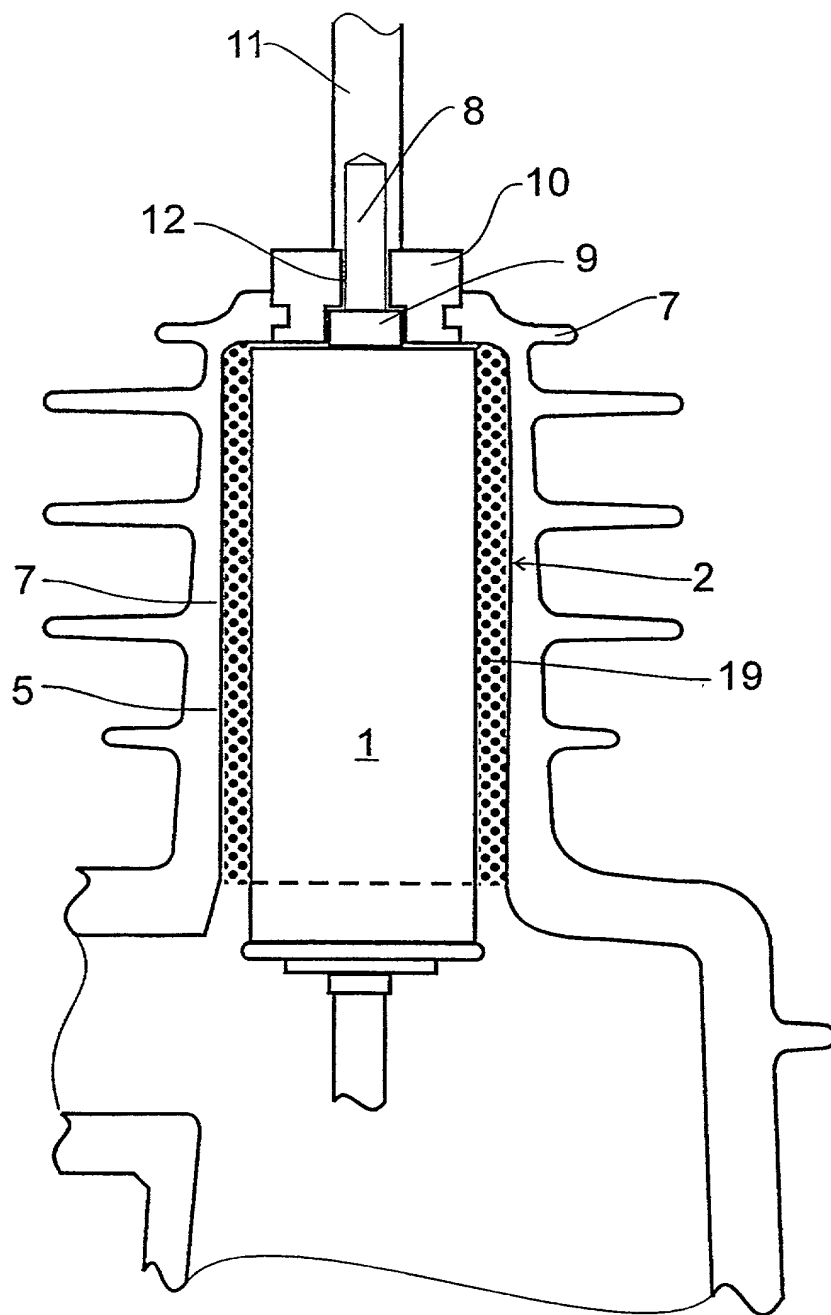


FIG. 7

8 / 11

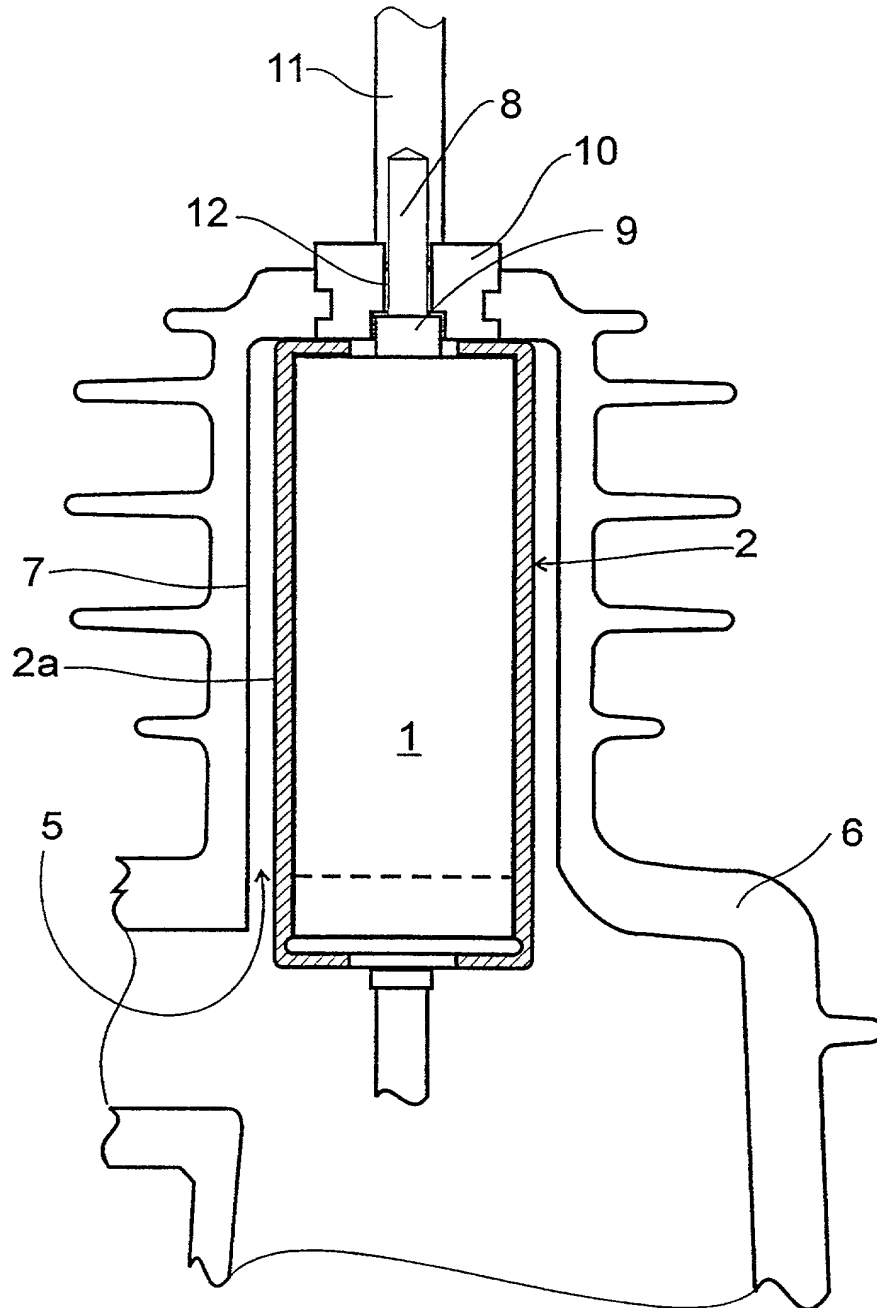


FIG. 8

9 / 11

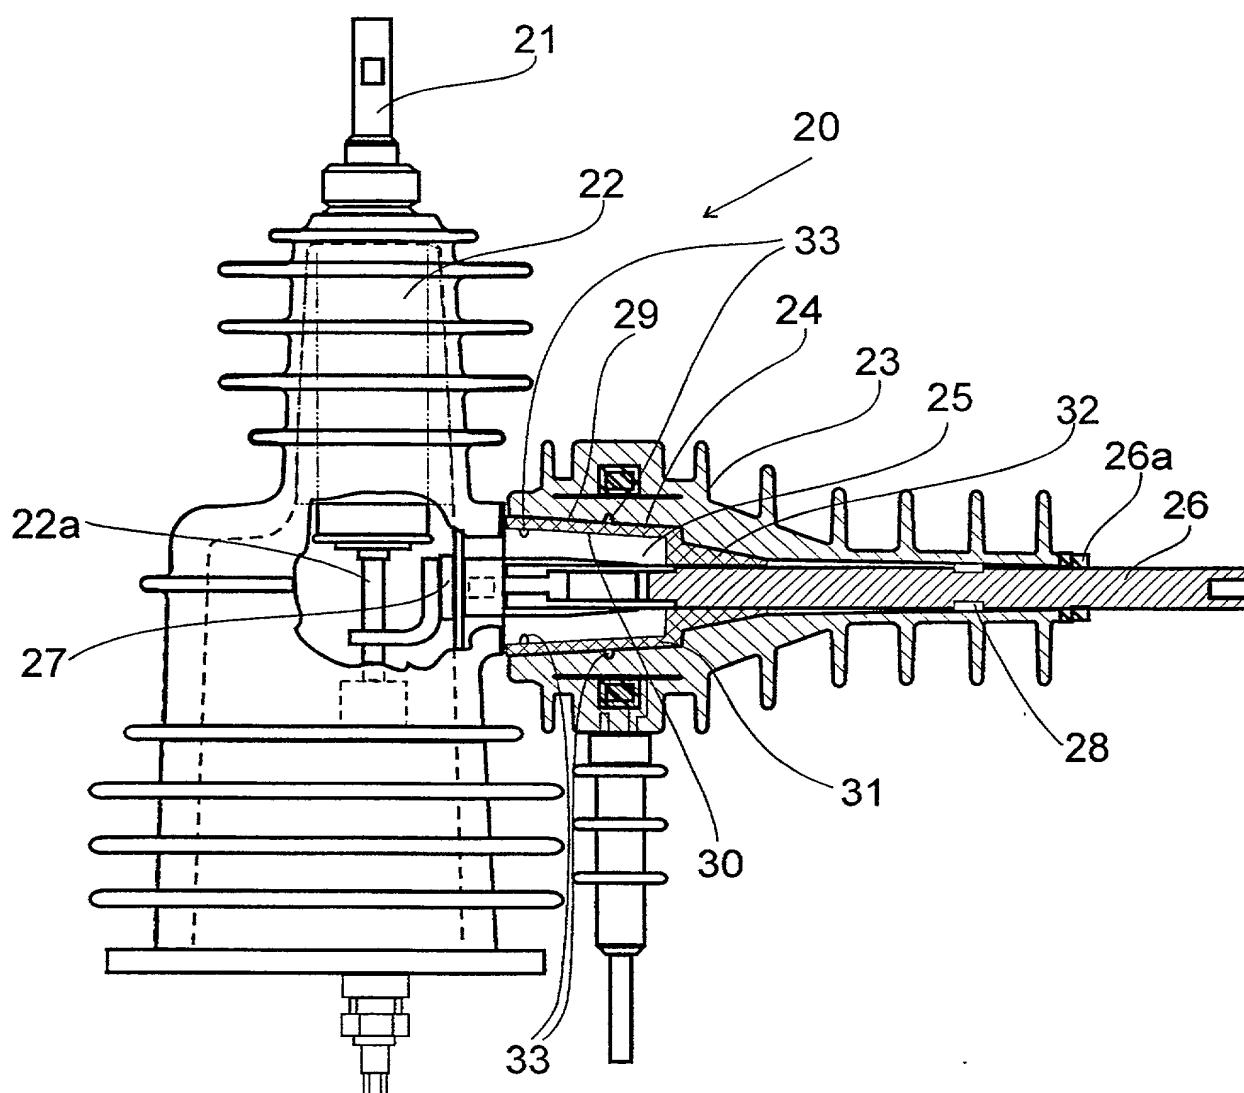


FIG. 9

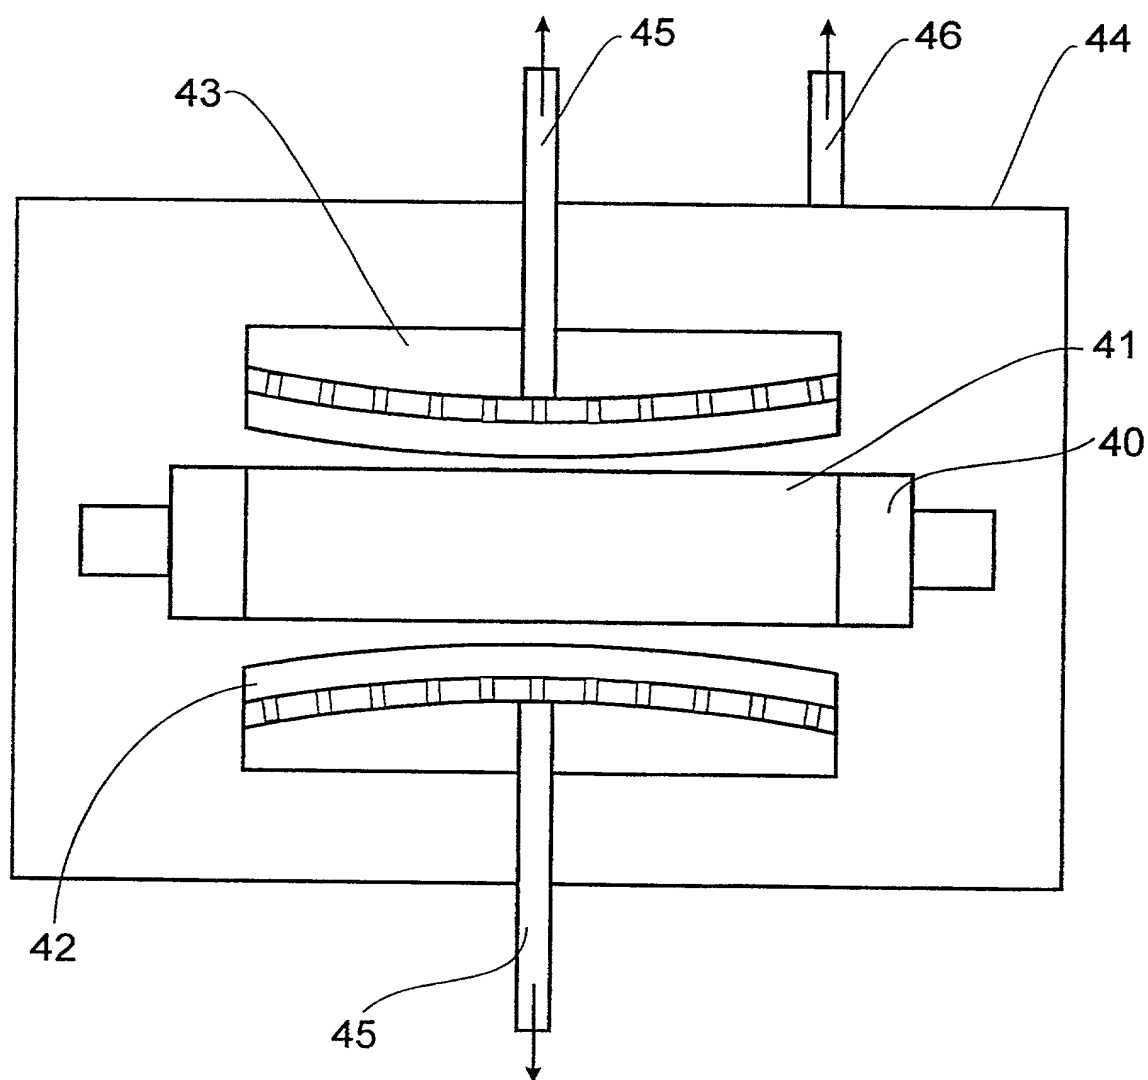


FIG. 10

11 / 11

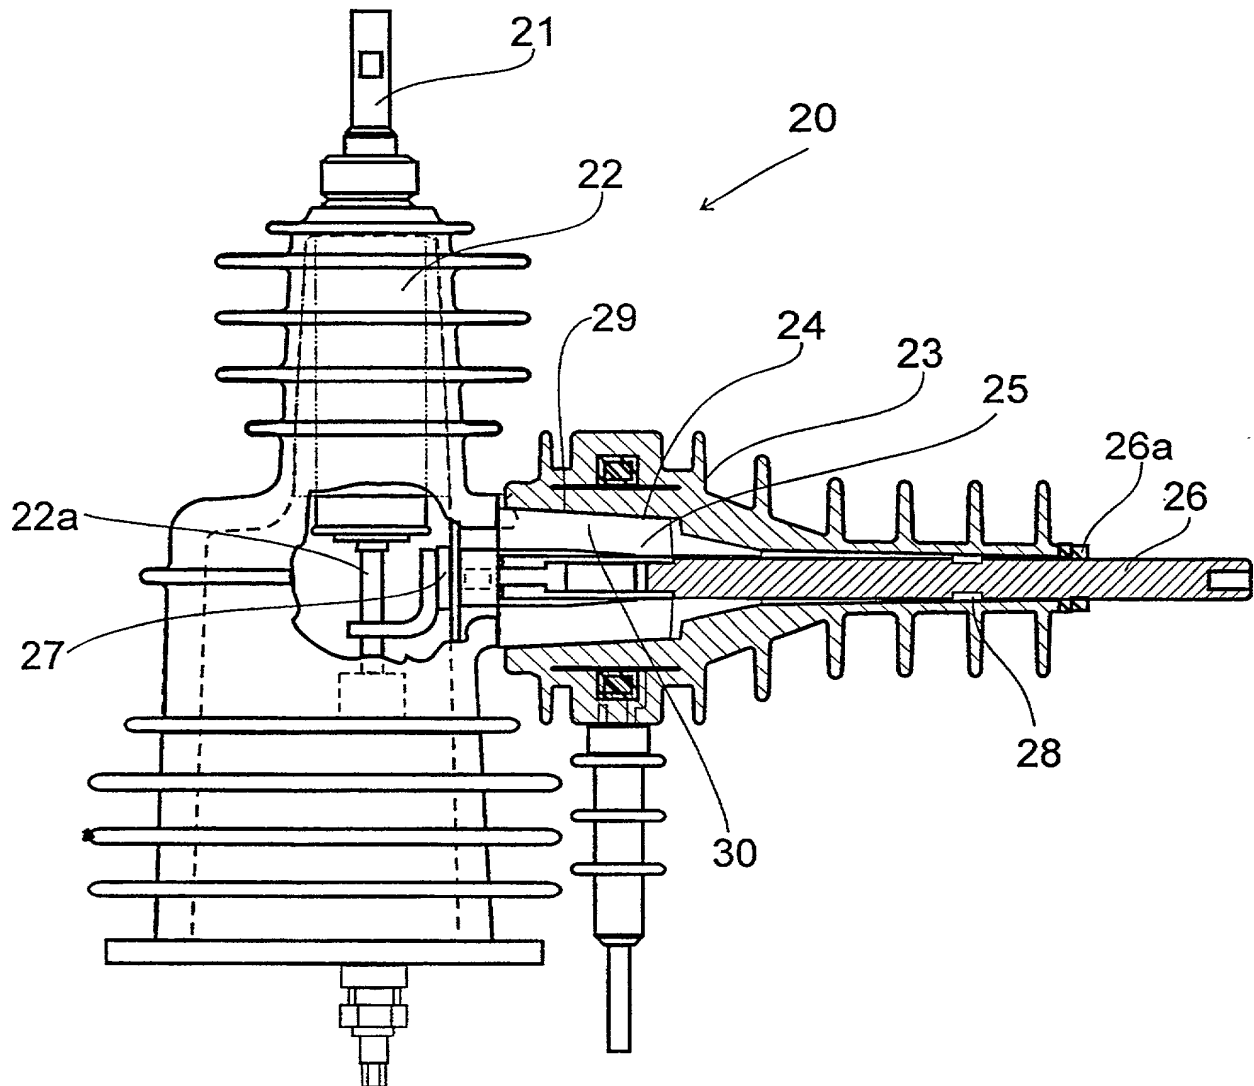


FIG. 11

#4

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>  <input type="checkbox"/> Declaration Submitted with Initial Filing      OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16(e)) required)		Attorney Docket Number	
		First Named Inventor	
		<b>COMPLETE IF KNOWN</b>	
		Application Number	
		Filing Date	
		Group Art Unit	
		Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "METHOD FOR ASSEMBLY OF INSULATED HOUSINGS FOR ELECTRICAL EQUIPMENT AND INCORPORATION OF CIRCUIT INTERRUPTERS THEREIN", the specification of which is attached hereto unless the following box is checked:

- ☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) of 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATIONS				
Number(s)	Country	Filing Date	Priority Claimed	Certified Copy Attached?
PP8039	AUSTRALIA	January 6, 1999	YES	NO
PQ0421	AUSTRALIA	MAY 19, 1999	YES	NO
10034/99	AUSTRALIA	JANUARY 6, 1999	NO	NO

I hereby claim the benefit under 35 U.S.C. 119(3) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

U.S. Parent Application or PCT Parent Number	Parent Filing Date	Parent Patent Number (if applicable)
PCT/AU99/011150	December 22, 1999	N/A

Direct all correspondence to: Roth & Goldman, Comerica Bldg.-STE 500, 21535 Hawthorne Blvd., Torrance, California 90503, United States of America.  
Phone: 310 316 5399; Facsimile: 310 316 9143

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: David Russell Murray

Inventor's signature: [Signature] Date: 6/7/01

Residence: Wynnum, Brisbane, Queensland 4178 AUK

Citizenship: [Signature]

Post Office Address: 55 Waterloo Esplanade, Wynnum, Brisbane, Queensland, 4178, Australia

Full name of additional joint inventor: Brett Alexander Watson

Inventor's signature: [Signature] Date: 6/7/01

Residence: Annerley, Brisbane, Queensland, 4178, Australia AUK

Citizenship: [Signature]

Post Office Address: 90 Smallman Street, Bulimba, Brisbane, Queensland, 4171 Australia

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**IN RE APPLICATION OF:**

David Russell Murray et al

Serial No.: 09/869563

Filed:

For: Method For Assembly of

Insulated Housings For Electrical

Equipment And Incorporation of

Circuit Interrupters Therein

Group

Examiner:

Atty. doc. 11247

Hon. Commissioner for Patents

Washington, D. C. 20231

**POWER OF ATTORNEY**

**(APPOINTMENT OF ATTORNEY BY ASSIGNEE)**

Dear Sir:

The undersigned Nu-Lec Industries Pty, Ltd., which is the ASSIGNEE of Messers David Russell Murray and Brett Alexander Watson, the inventors named in the above identified application, hereby revokes all powers of attorney previously granted in the application and appoints

**Ronald M. Goldman, Esq.**

Registration No. 24,057

of

Roth & Goldman,

21535 Hawthorne Blvd. Suite 500

Torrance, Ca. 90503

(310) 316-5399

as its attorney, with full power of substitution, to prosecute the above identified applications for patent and to transact all business in the Patent and Trademark Office connected therewith. Please address all correspondence in the application to Ronald M. Goldman at the above address.

**AUTHORIZATION OF ATTORNEY**

**TO ACCEPT AND FOLLOW INSTRUCTIONS FROM REPRESENTATIVE**

Applicant authorizes the U.S. attorney named above to accept and follow instructions from Peter C. Fisher of the firm of Fisher Adams Kelly, 10 Eagle Street, Brisbane 4000, Queensland Australia and those others of that firm whom Mr. Fisher designates to give direction as to any actions to be taken in the Patent and Trademark Office regarding this application without direct communications between the U.S. attorney and the undersigned. In the event of a change in the person from whom instructions may be taken, the U.S. attorney named as identified above will be notified by the undersigned.

NU-LEC INDUSTRIES PTY LTD.

By: D. R. Murray

(signature)

Print: D. R. MURRAY

Title: R&D MANAGER

Date: 6/7/, 2001

doc. 11247

09869563 "DBE" 10